


PNP Plastic-Encapsulate Transistors

Application

- ◆ Power management
 - DC/DC converters
 - Supply line switching
 - Battery charger
 - Linear voltage regulation (LDO).
- ◆ Peripheral drivers
 - Driver in low supply voltage applications, e.g. lamps, LEDs
 - Inductive load driver, e.g. relays, buzzers, motors.

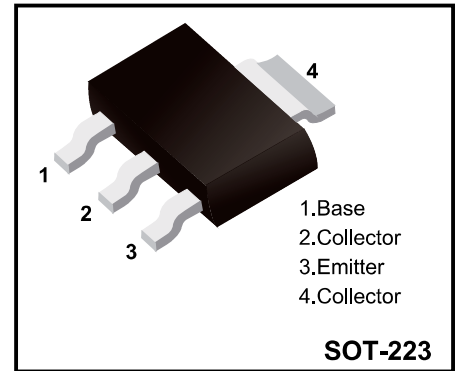

Feature

- ◆ Low collector-emitter saturation voltage
- ◆ High collector current capability: I_C and I_{CM}
- ◆ High collector current gain (h_{FE}) at high I_C
- ◆ Higher efficiency leading to less heat generation
- ◆ Complement to PBSS4350Z

Marking Code	
PBSS5350Z	PB5350

Absolute Maximum Rating ($T_C=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	BV_{CBO}	-60	V
Collector-Emitter Voltage	BV_{CEO}	-50	V
Emitter-Base Voltage	BV_{EBO}	-6	V
Collector Current(DC)	I_C	-3	A
Peak collector current Current	I_{CM}	-5	A
Collector Power Dissipation	P_C	1.35	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature	T_{stg}	-55~150	$^{\circ}C$

Thermal Characteristics

Parameter	Symbol	Cnditions	Value	Unit
Resistance from junction to ambient in	$R_{\theta JA}$	in free air; notes 1	92	$^{\circ}C/W$
		in free air; notes 2	62.5	$^{\circ}C/W$

Notes

1. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector $1cm^2$
2. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector $6cm^2$

Electrical Characteristics ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV_{CBO}	$I_C = -100\mu\text{A}, I_E = 0$	-60			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = -1\text{mA}, I_B = 0$	-50			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = -100\mu\text{A}, I_C = 0$	-6			V
Collector cut-off current	I_{CBO}	$V_{CB} = -50\text{V}, I_B = 0$			-100	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5\text{V}, I_C = 0$			-100	nA
* DC current gain	h_{FE}	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$ $V_{CE} = -2\text{V}, I_C = -1\text{A}$ $V_{CE} = -2\text{V}, I_C = -2\text{A}$	200 200 100			
* Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -500\text{mA}, I_B = -50\text{mA}$			-100	mV
		$I_C = -1\text{A}, I_B = -50\text{mA}$			-180	mV
		$I_C = -2\text{A}, I_B = -200\text{mA}$			-300	mV
*Equivalent on-resistance	R_{CEsat}	$I_C = -2\text{A}, I_B = -200\text{mA}$			150	$\text{m}\Omega$
* Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -2\text{A}, I_B = -200\text{mA}$			-1.3	V
* Base-emitter turn-on voltage	$V_{BE(on)}$	$V_{CE} = -2\text{V}, I_C = -1\text{A}$			-1.1	V
Transition frequency	f_T	$V_{CE} = -5\text{V}, I_C = -100\text{mA}$	100			MHz
Collector capacitance	C_C	$V_{CB} = -10\text{V}, I_E = I_C = 0, f = 1\text{MHz}$			40	pF

* Pulse test: $PW \leq 300\mu\text{s}$, duty cycle $\leq 2\%$ Pulse

Typical Characteristics

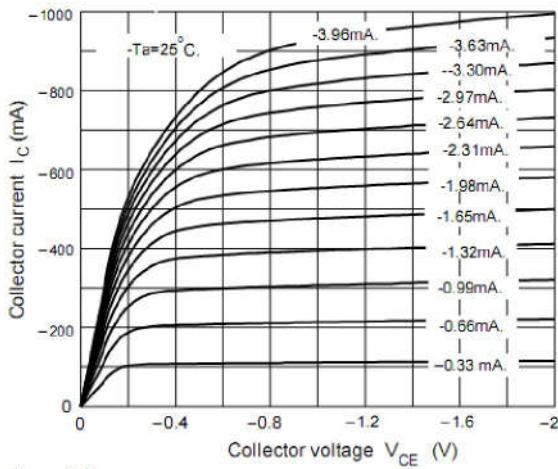


Figure 1. Static Characteristic

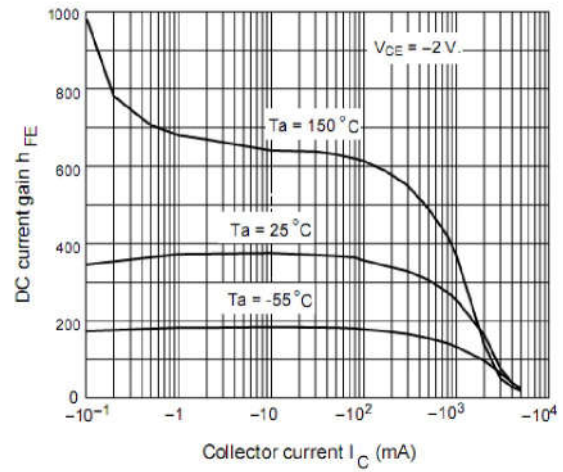


Figure 2. DC current Gain

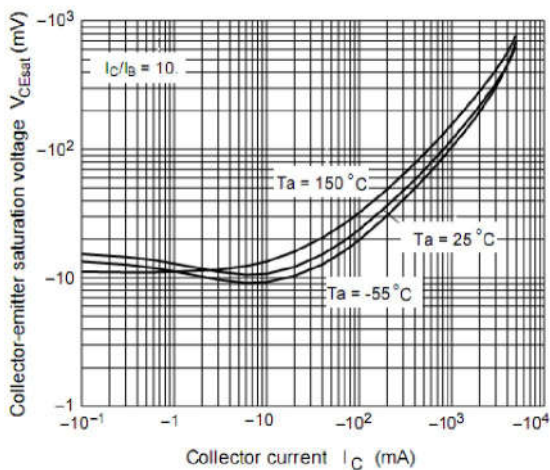


Figure 3. Collector-Emitter Saturation Voltage

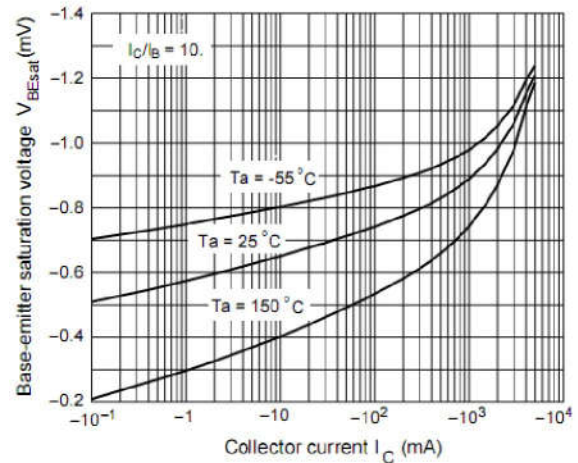


Figure 4. Base-Emitter Saturation Voltage

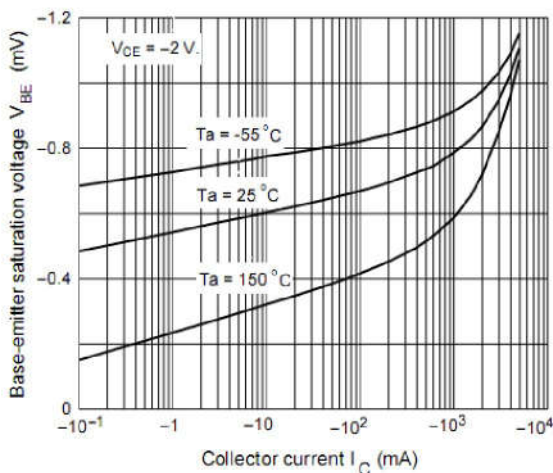


Figure 5. Base-Emitter on Voltage

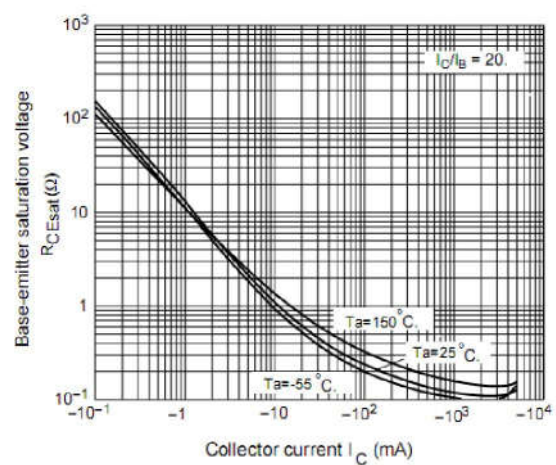


Figure 6. Equivalent on-resistance

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-223	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton
	Tape/Reel, 13" reel	2500pcs/Reel	5000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-223

Dlm	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.80	0.059	0.071
A1	0.00	0.10	0.000	0.004
A2	1.50	1.70	0.059	0.067
b	0.65	0.75	0.026	0.030
c	0.20	0.30	0.008	0.012
D	6.40	6.60	0.252	0.260
D1	2.90	3.10	0.114	0.122
E	3.30	3.70	0.130	0.146
E1	6.85	7.15	0.270	0.281
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	1.65	1.85	0.065	0.073
L1	0.90	1.15	0.035	0.045

The recommended mounting pad size

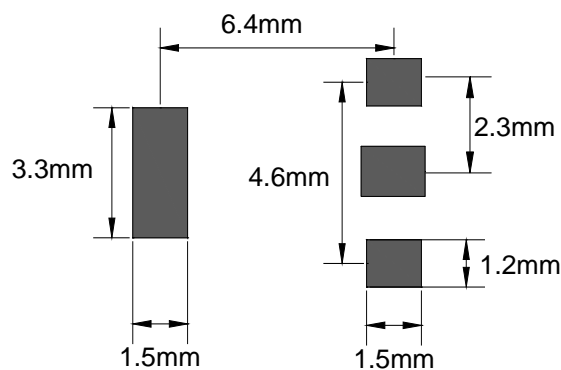

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.