


NPN Darlington Transistor

APPLICATIONS

- ◆ Lamp
- ◆ Relay
- ◆ Solenoid Driving

FEATURES

- ◆ High breakdown voltage: $BV_{CEO} > 100V$
- ◆ High continuous collector current $I_C = 900mA$
- ◆ Peak pulse current $I_{CM} = 5A$
- ◆ Power dissipation 625mW
- ◆ $h_{FE} > 5k$ up to 2A for high current gain hold up
- ◆ Complementary PNP Type: FMMT734

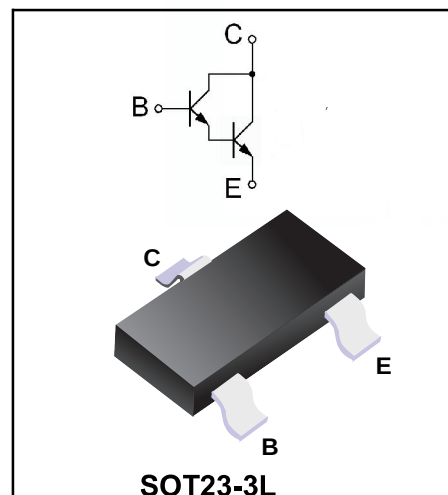

Marking Code

FMMT634

634

Absolute Maximum Ratings ($T_a = 25^\circ C$, unless otherwise specified.)

Parameter	Symbol	Value	Unit
Collector-base voltage	BV_{CBO}	120	V
Collector-emitter voltage	BV_{CEO}	100	V
Emitter-base voltage	BV_{EBO}	12	V
Collector current	I_C	900	mA
Peak pulse current	I_{CM}	5	A
Power dissipation	P_D	625	mW
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 ~ +150	$^\circ C$

Thermal Characteristics ($T_a = 25^\circ C$, unless otherwise specified.)

Parameter	Conditions	Symbol	Value	Unit
Junction to ambient	In air, 25mm ² FR4 PCB	$R_{\theta JA}$	200	$^\circ C/W$
Junction to ambient	Same as above, $t = 5s$	$R_{\theta JA}$	155	$^\circ C/W$
Junction to leads	junction to solder point	$R_{\theta JL}$	194	$^\circ C/W$

Electrical Characteristics (Ta=25°C, unless otherwise specified.)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-base breakdown voltage	$I_C = 100\mu A, I_E = 0$	BV_{CBO}	120			V
Collector-emitter breakdown voltage *	$I_C = 10mA, I_B = 0$	BV_{CEO}	100			V
Emitter-base breakdown voltage	$I_E = 100\mu A, I_C = 0$	BV_{EBO}	12			V
Collector cut-off current	$V_{CB} = 80V, I_E = 0$	I_{CBO}			10	nA
Collector emitter cutoff current	$V_{CES} = 80V$	I_{CES}			100	nA
Emitter cut-off current	$V_{EB} = 7V, I_C = 0$	I_{EBO}			10	nA
DC current gain *	$V_{CE} = 5V, I_C = 10mA$ $V_{CE} = 5V, I_C = 100mA$ $V_{CE} = 5V, I_C = 1A$ $V_{CE} = 5V, I_C = 2A$ $C_E = 2V, I_C = 1A$ $V_{CE} = 5V, I_C = 5A$	h_{FE}	20k 15k 5k	50k 60k 40k 14k 24k 600		
Collector-emitter saturation voltage *	$I_C = 100mA, I_B = 1mA$ $I_C = 250mA, I_B = 1mA$ $I_C = 500mA, I_B = 5mA$ $I_C = 900mA, I_B = 5mA$ $I_C = 1A, I_B = 5mA$	$V_{CE(sat)}$		0.67 0.72 0.75 0.82 0.85	0.75 0.80 0.85 0.93 0.96	V
Base -emitter saturation voltage *	$I_C = 1A, I_B = 5mA$	$V_{BE(sat)}$			1.65	V
Base -emitter on voltage *	$V_{CE} = 5V, I_C = 1A$	$V_{BE(on)}$			1.50	V
Current gain - bandwidth product	$V_{CE} = 10V, I_C = 50mA$ $f = 100 MHz$	f_T		140		MHz
Output capacitance	$V_{CB} = 10 V, f = 1.0MHz$	C_{ob}			20	pF
Turn-on time	$V_{CC} = 20V,$ $I_C = 50mA$ $I_{B1} = - I_{B2} = 1mA$	t_{on}		290		ns
Turn-off time		t_{off}		2400		ns

* Measured under pulsed conditions. Pulse width 300μs. Duty cycle 2%

Typical Characteristics

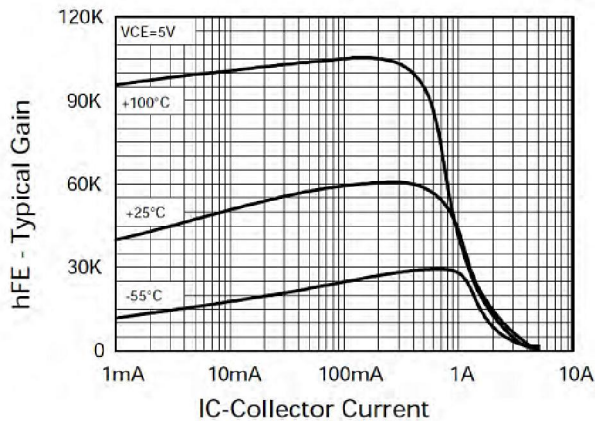


Figure 1. DC current Gain

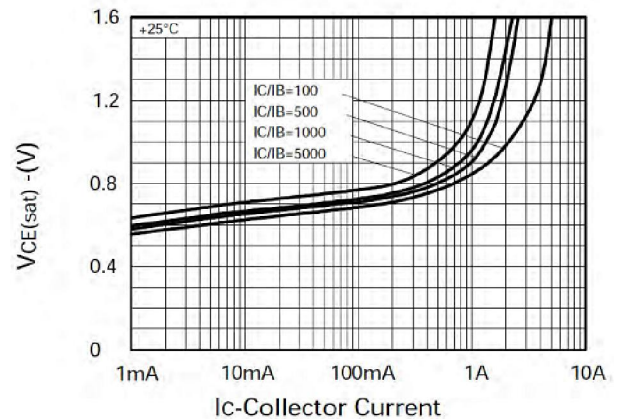


Figure 2. Collector-Emitter Saturation Voltage

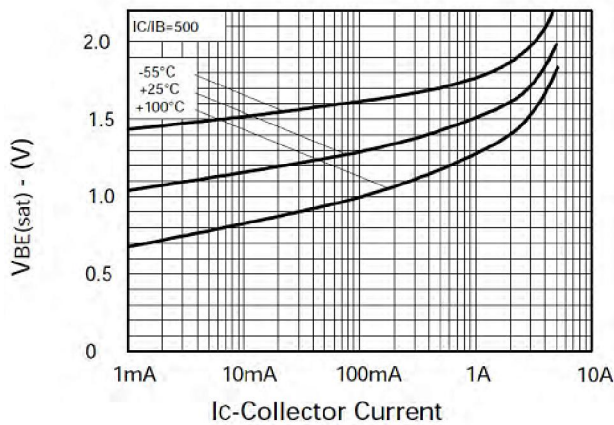


Figure 3. Base-Emitter Saturation Voltage

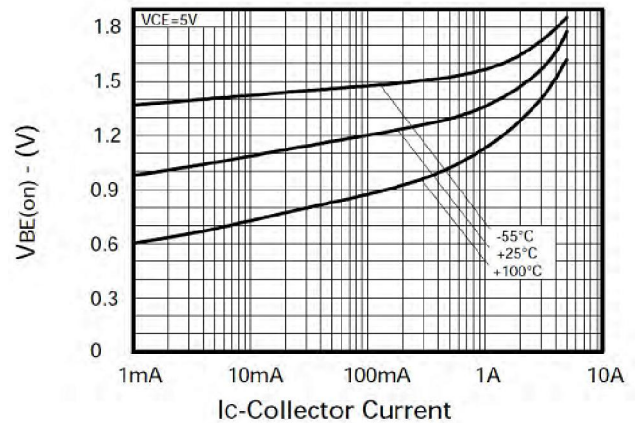


Figure 4. Base-Emitter on Voltage

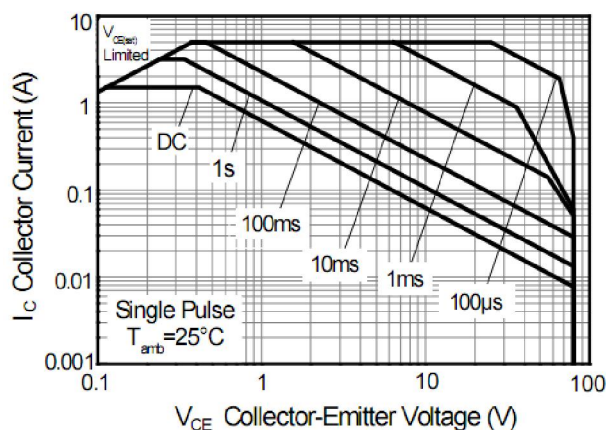


Figure 5. Safe Operating Area

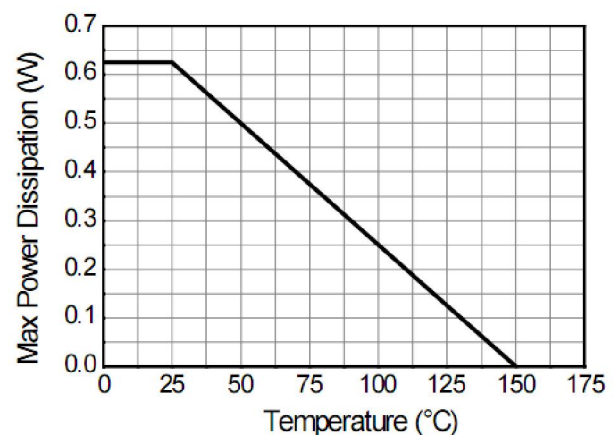


Figure 6. Derating Curve

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT23-3L	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 180000PCS/Carton

Package Dimensions

SOT23-3L

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.05	1.25	41	49.2
A1	0.10		3.93	
A2	1.05	1.15	41	45
b	0.30	0.50	12	20
c	0.10	0.20	3.93	7.9
D	2.82	3.02	111	119
E	1.50	1.70	59	67
E1	2.65	2.95	104	116
a	0.95		37.4	
a1	1.80	2.00	71	78
L	0.30	0.066	12	26
Θ	8°			

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.