


**Plastic-Encapsulate Transistors**

DUAL TRANSISTOR (NPN+NPN)

**FEATURES**

- ◆Epitaxial Planar Die Construction
- ◆Ideal for Low Power Amplification and Switching

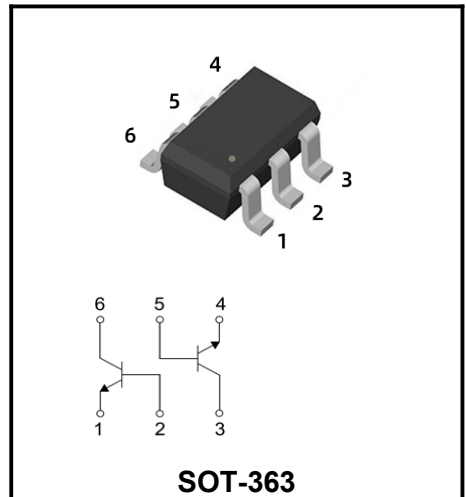

Marking Code	
MMDT4401DW	K2X









**Maximum Ratings (Ta = 25°C unless otherwise specified)**

Symbol	Parameter	Value	Units
V <sub>CB0</sub>	Collector-Base Voltage	60	V
V <sub>CEO</sub>	Collector-Emitter Voltage	40	V
V <sub>EBO</sub>	Emitter-Base Voltage	6	V
I <sub>C</sub>	Collector Current -Continuous	0.6	A
P <sub>C</sub>	Collector Power Dissipation	0.2	W
R <sub>θJA</sub>	Thermal Resistance from Junction to Ambient	625	°C/W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55 to +150	°C

**NPN 4401 ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = 100 μA, I <sub>E</sub> =0	60		V
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = 1mA, I <sub>B</sub> =0	40		V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = 100 μA, I <sub>C</sub> =0	6		V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = 50 V, I <sub>E</sub> =0		0.1	μA
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = 35 V, I <sub>B</sub> =0		0.5	μA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>C</sub> =0		0.1	μA
DC current gain	h <sub>FE(1)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 0.1mA	20		
	h <sub>FE(2)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 1mA	40		
	h <sub>FE(3)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 10mA	80		
	h <sub>FE(4)</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 150mA	100	300	
	h <sub>FE(5)</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 500mA	40		
Collector-emitter saturation voltage	V <sub>CE(sat)1</sub>	I <sub>C</sub> =150 mA, I <sub>B</sub> = 15mA		0.4	V
	V <sub>CE(sat)2</sub>	I <sub>C</sub> =500 mA, I <sub>B</sub> = 50mA		0.75	V
Base-emitter saturation voltage	V <sub>BE(sat)1</sub>	I <sub>C</sub> = 150 mA, I <sub>B</sub> = 15mA	0.75	0.95	V
	V <sub>BE(sat)2</sub>	I <sub>C</sub> = 500 mA, I <sub>B</sub> = 50mA		1.2	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 20mA, f=100MHz	250		MHz
Output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =5V, I <sub>E</sub> = 0, f=1MHz		6.5	pF
Delay time	t <sub>d</sub>	V <sub>CC</sub> =30V,		15	nS
Rise time	t <sub>r</sub>	V <sub>BE</sub> =2V, I <sub>C</sub> =150mA, I <sub>B1</sub> =15mA		20	nS
Storage time	t <sub>s</sub>	V <sub>CC</sub> =30V, I <sub>C</sub> =150mA, I <sub>B1</sub> =-I <sub>B2</sub> =15mA		225	nS
Fall time	t <sub>f</sub>			30	nS

Typical Characteristics

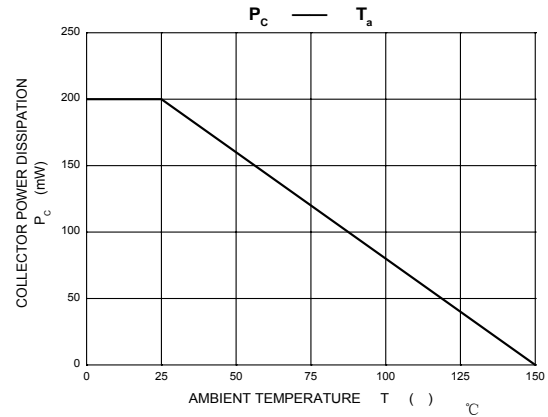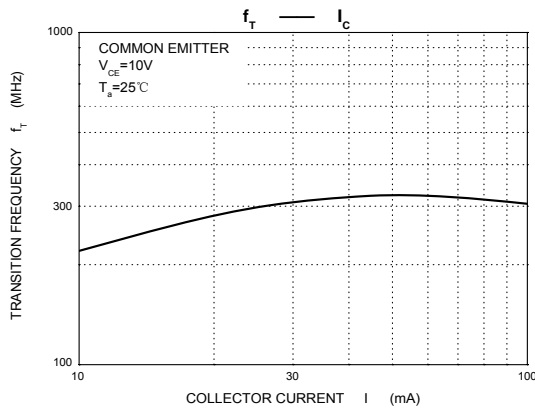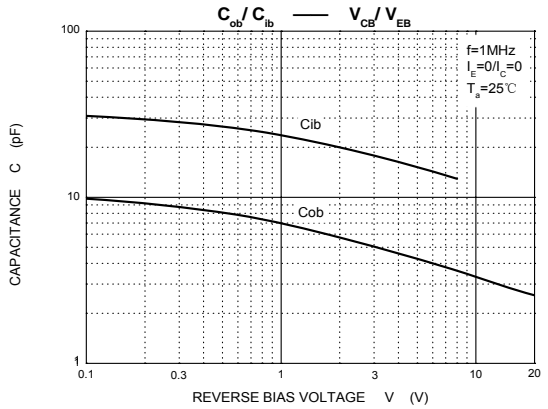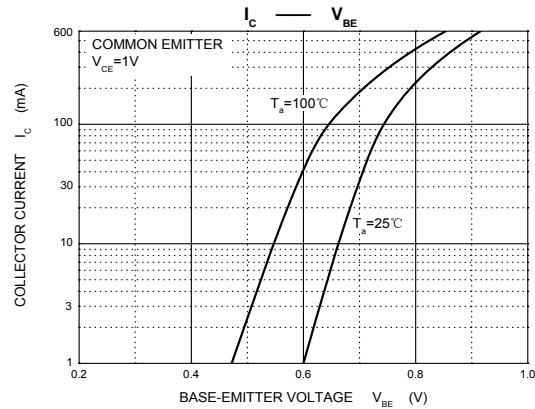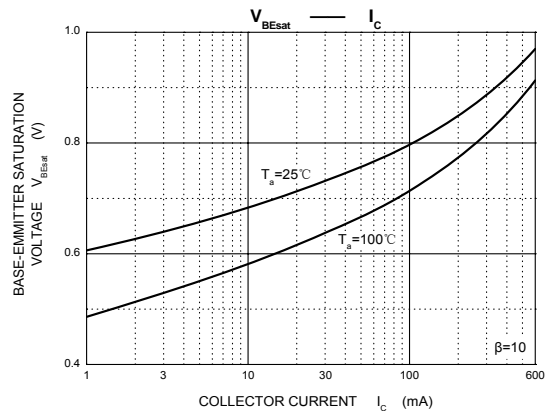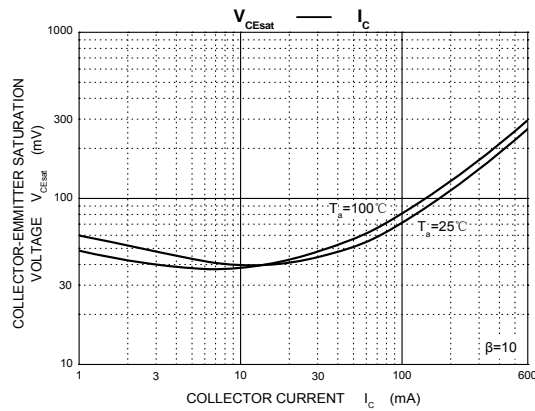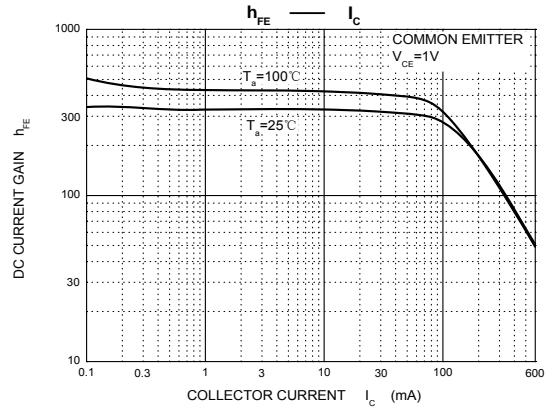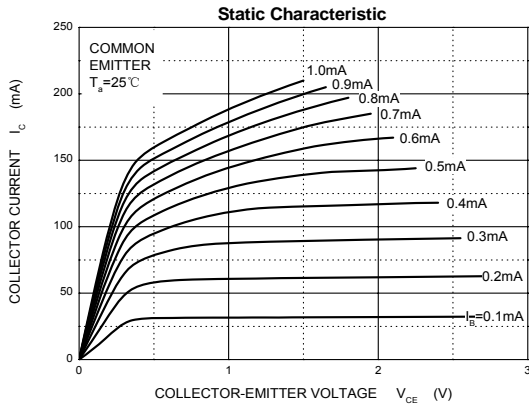

**Ordering information**


Package	Packing Description	Packing Quantity
SOT-363	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

**Package Dimensions**

**SOT-363**

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	-	0.1	-	3.94
bp	0.20	0.30	7.87	11.81
c	0.10	0.25	3.94	9.84
D	1.8	2.2	70.87	86.61
E	1.15	1.35	45.28	53.15
e	1.3		51.18	
e1	0.65		25.6	
HE	2.0	2.2	78.74	86.6
Lp	0.15	0.45	5.90	17.71
Q	0.15	0.25	5.90	9.84
v	0.2		7.78	
w	0.2		7.78	
y	0.1		3.94	

**The recommended mounting pad size**

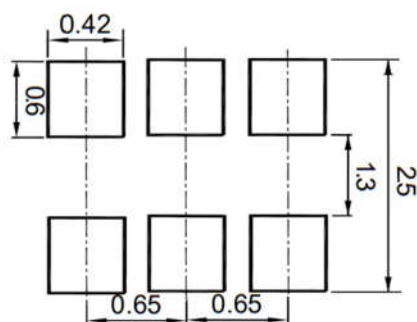

## Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.