

**P-Channel Enhancement Mode**


**Product Summary**

BVDSS	RDSON	ID
-30V	43mΩ <sub>(max)</sub>	-5.1A

**General Description**

The **YFW3409** is the highest performance trench P-ch MOSFET with extreme high cell density , which provide excellent RDSON and gate charge for most of the small power switching and load switch applications.

The **YFW3409** meet the RoHS and Green Product requirement with full function reliability approved.

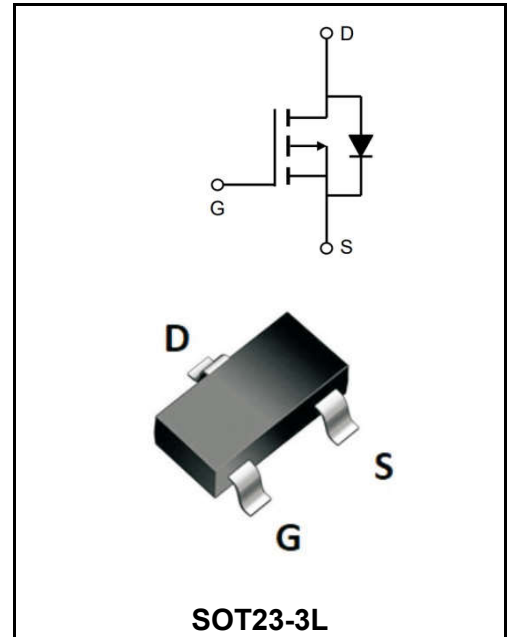

<b>Marking Code</b>	
YFW3409MI	3409

**Features**

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Green Device Available

**Applications**

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

**Absolute Maximum Ratings (Ta=25°C)**

Symbol	Parameter	Rating	Units
V <sub>DS</sub>	Drain-Source Voltage	-30	V
V <sub>GS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub> @T <sub>C</sub> =25°C	Continuous Drain Current, V <sub>GS</sub> @ -10V <sup>1</sup>	-5.1	A
I <sub>D</sub> @T <sub>C</sub> =70°C	Continuous Drain Current, V <sub>GS</sub> @ -10V <sup>1</sup>	-4.0	A
I <sub>DM</sub>	Pulsed Drain Current <sup>2</sup>	-30	A
P <sub>D</sub> @T <sub>A</sub> =25°C	Total Power Dissipation <sup>3</sup>	1.4	W
P <sub>D</sub> @T <sub>A</sub> =70°C	Total Power Dissipation <sup>3</sup>	0.75	W
T <sub>STG</sub>	Storage Temperature Range	-55 to 150	°C
T <sub>J</sub>	Operating Junction Temperature Range	-55 to 150	°C

**Thermal Data**

Symbol	Parameter	Typ.	Max.	Unit
R <sub>θJA</sub>	Thermal Resistance Junction-Ambient <sup>1</sup>	---	125	°C/W
R <sub>θJA</sub>	Thermal Resistance Junction-Ambient <sup>1</sup> (t ≤ 10s)	---	95	°C/W
R <sub>θJC</sub>	Thermal Resistance Junction-Case <sup>1</sup>	---	80	°C/W

**Electrical Characteristics (Ta=25°C unless otherwise specified.)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-30	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	$BV_{DSS}$ Temperature Coefficient	Reference to 25°C, $I_D=-1mA$	---	-0.023	---	V/°C
$R_{DS(ON)}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{GS}=-10V, I_D=-3A$	---	---	43	mΩ
		$V_{GS}=-4.5V, I_D=-2A$	---	---	55	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}, I_D=-250\mu A$	-0.7	-1.0	-1.3	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	4	---	mV/°C
$I_{DSS}$	Drain-Source Leakage Current	$V_{DS}=-24V, V_{GS}=0V, T_J=25^\circ C$	---	---	-1	μA
		$V_{DS}=-24V, V_{GS}=0V, T_J=55^\circ C$	---	---	-5	
$I_{GSS}$	Gate-Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	±100	nA
$g_{fs}$	Forward Transconductance	$V_{DS}=-5V, I_D=-3A$	---	11	---	S
$Q_g$	Total Gate Charge (-4.5V)	$V_{DS}=-15V, V_{GS}=-4.5V, I_D=-3A$	---	6.4	8.3	nC
$Q_{gs}$	Gate-Source Charge		---	1.8	2.3	
$Q_{gd}$	Gate-Drain Charge		---	1.4	1.8	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-15V, V_{GS}=-10V, R_G=3.3\Omega, I_D=-3A$	---	11.4	22.72	ns
$T_r$	Rise Time		---	2.3	4.6	
$T_{d(off)}$	Turn-Off Delay Time		---	34.9	69.8	
$T_f$	Fall Time		---	3.5	7	
$C_{iss}$	Input Capacitance	$V_{DS}=-15V, V_{GS}=0V, f=1MHz$	---	826	---	pF
$C_{oss}$	Output Capacitance		---	90.7	---	
$C_{rss}$	Reverse Transfer Capacitance		---	53.2	---	

**Diode Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_S$	Continuous Source Current <sup>1,4</sup>	$V_G=V_D=0V, \text{ Force Current}$	---	---	-2	A
$I_{SM}$	Pulsed Source Current <sup>2,4</sup>		---	---	-10	A
$V_{SD}$	Diode Forward Voltage <sup>2</sup>	$V_{GS}=0V, I_S=-1A, T_J=25^\circ C$	---	---	-1	V
$t_{rr}$	Reverse Recovery Time	$I_F=-3A, dI/dt=100A/\mu s, T_J=25^\circ C$	---	10	---	ns
$Q_{rr}$	Reverse Recovery Charge		---	5.1	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch<sup>2</sup>FR-4 board with 2OZ copper,t<10sec.
- 2.The data tested by pulsed , pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature
- 4.The data is theoretically the same as  $I_D$  and  $I_{DM}$ , in real applications , should be limited by total power dissipation.

Typical characteristics

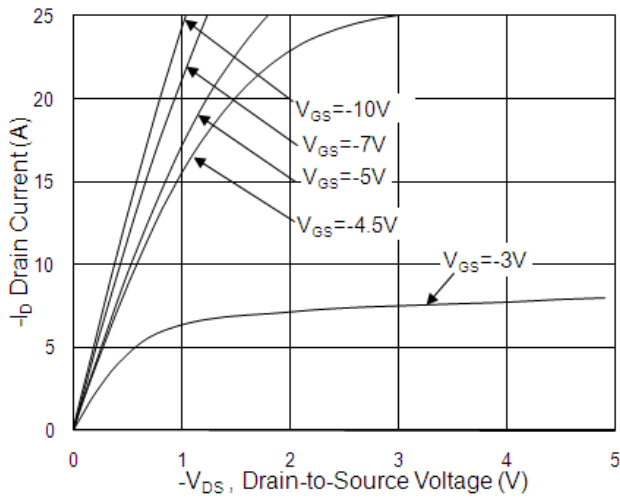


Fig.1 Typical Output Characteristics

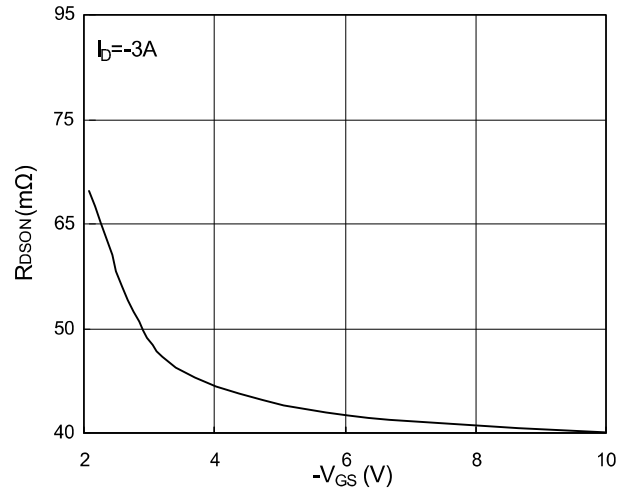


Fig.2 On-Resistance v.s Gate-Source

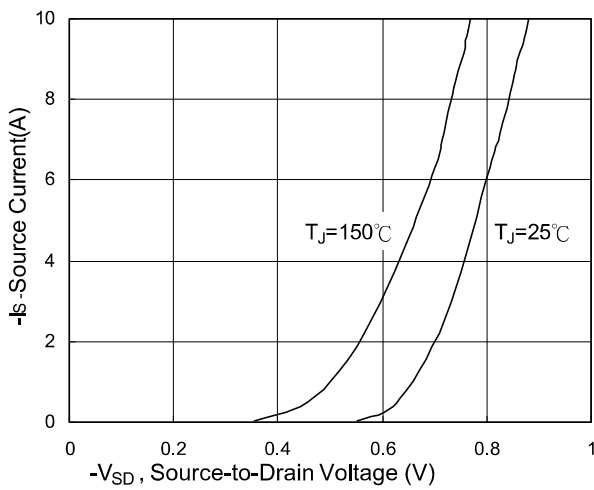


Fig.3 Forward Characteristics of Reverse

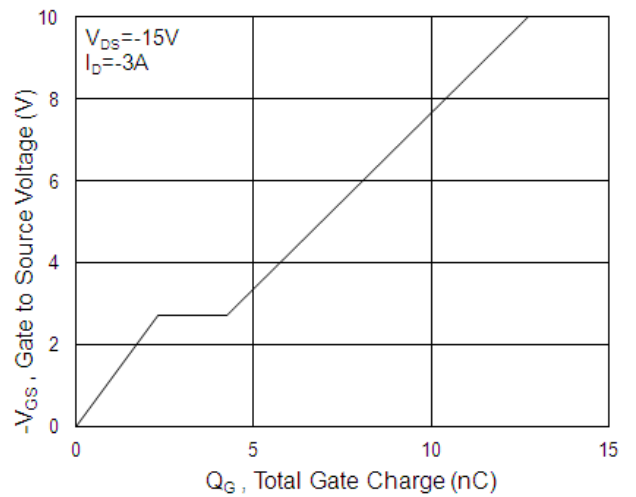


Fig.4 Gate-Charge Characteristics

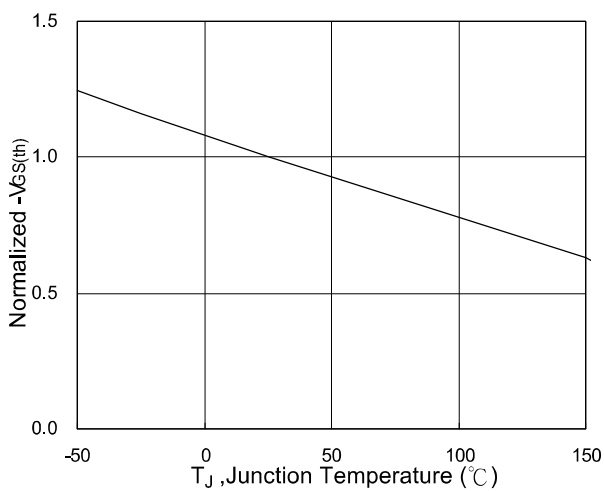


Fig.5 Normalized  $V_{GS(th)}$  vs.  $T_J$

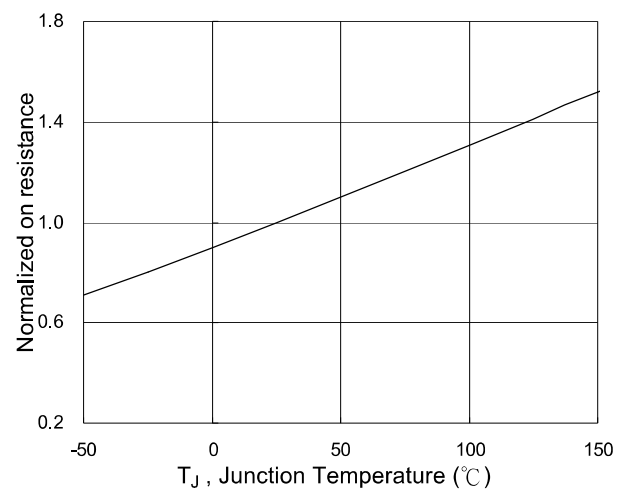


Fig.6 Normalized  $R_{DS(on)}$  vs  $T_J$

Typical characteristics

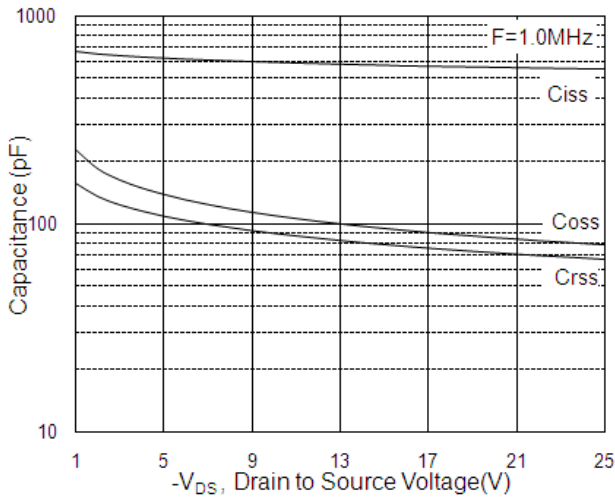


Fig.7 Capacitance

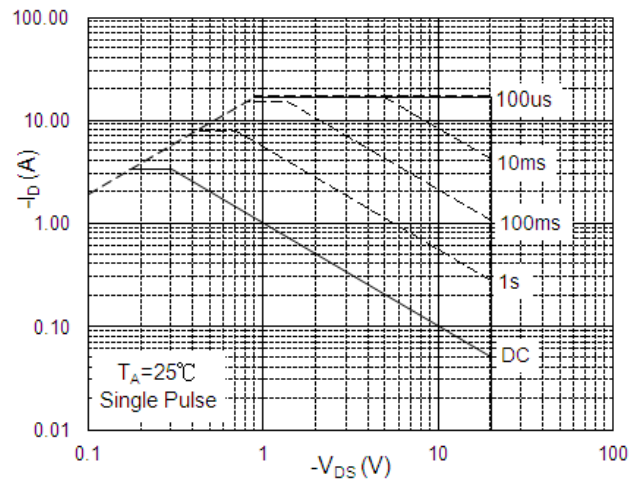


Fig.8 Safe Operating Area

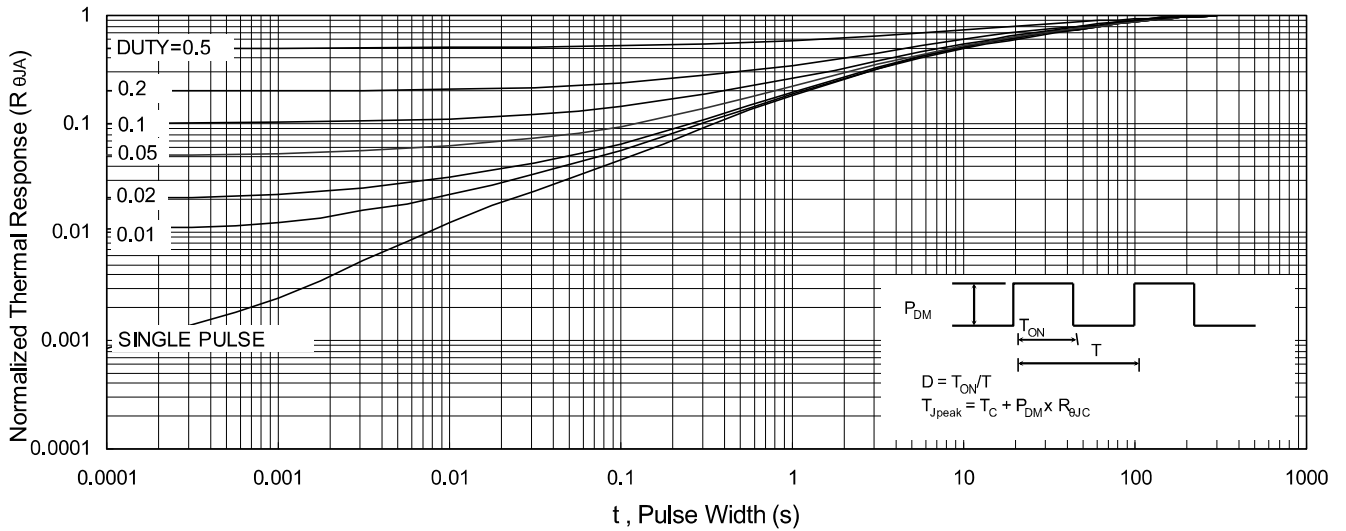


Fig.9 Normalized Maximum Transient Thermal Impedance

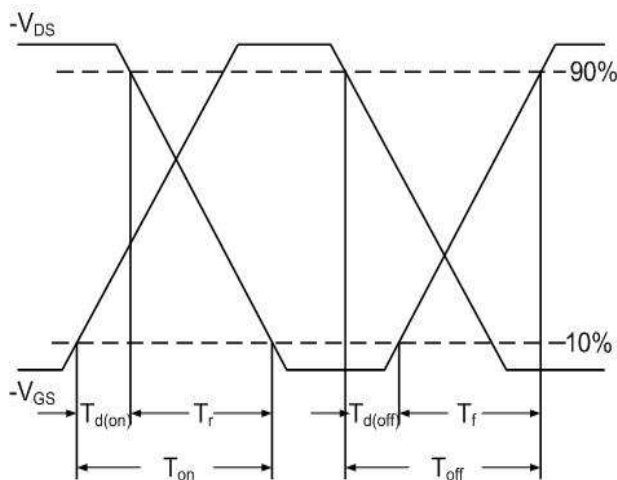


Fig.10 Switching Time Waveform

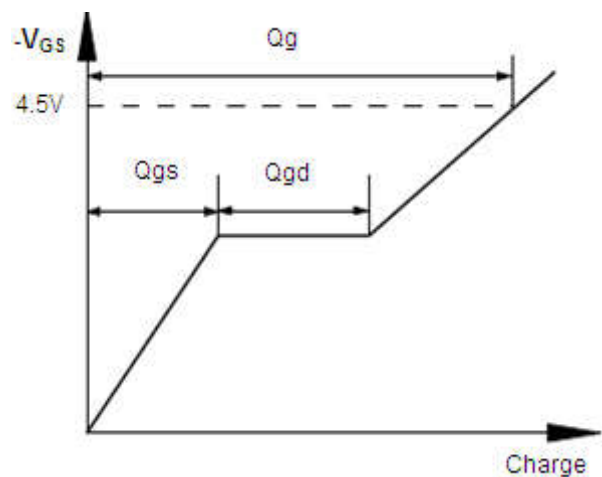


Fig.11 Gate Charge Waveform

**Ordering information**


Package	Packing Description	Base Quantity	Packing Quantity
SOT23-3L	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

**Package Dimensions**

**SOT23-3L**

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.05	1.25	41	49.2
A1	0.10		3.93	
A2	1.05	1.15	41	45
b	0.30	0.50	12	20
c	0.10	0.20	3.93	7.9
D	2.82	3.02	111	119
E	1.50	1.70	59	67
E1	2.65	2.95	104	116
e	0.95		37.4	
e1	1.80	2.00	71	78
L	0.30	0.066	12	26
Θ	8°			

**The recommended mounting pad size**



## Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.